




XC- Series Motorhome Chassis

| <u>FEATURE</u> | <u>BENEFIT</u> |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 55 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2006 MODEL YEAR

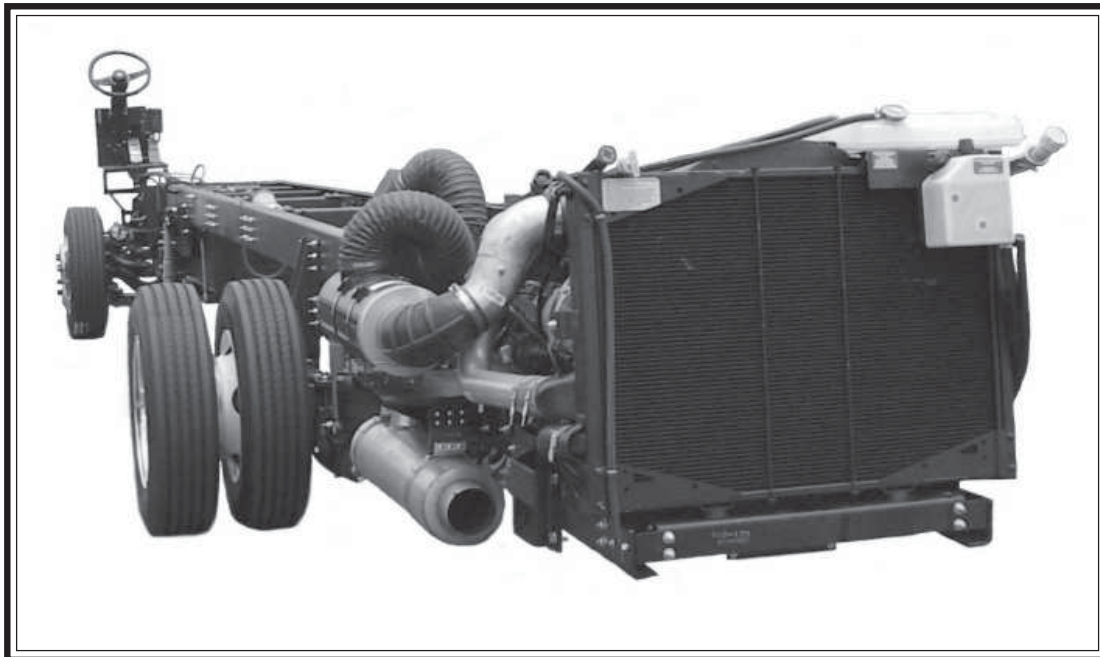

Land Yacht 390/396XL

by Airstream

Land Yacht 390/396 XL by Airstream Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 18.7 CFM air compressor
- Fuel/water separator
- Farr Eco -air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Engine Braking: Compression Brake with 3/6
- R-134A air conditioning compressor
- Electronic cruise control with high idle
- VIP steering wheel 18in (457mm)
- Douglas tilt/telescoping steering column
- Suspended & adjustable pedals
- Push button shift control
- LCD Info center
- Neway air ride suspension/tuned Sachs shock absorbers
- Goodyear G670 RV 275/70R 22.5, LRH
- Polished aluminum wheels with trim kit
- Heater hose assembly to front of chassis
- Haldex PURest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheelcut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/03/05, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



| | XC-SERIES |
|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Engine Peak Hp Peak Torque | Cummins ISL turbocharged, aftercooled, 8.9 L electronic diesel 400 Hp @ 1,900 rpm 1200 lb•ft (1627 N•m) @ 1,300 rpm |
| Transmission Gear Ratios: | Allison 3000MH six-speed automatic with lock up <u>First:</u> <u>Second:</u> <u>Third:</u> <u>Fourth:</u> <u>Fifth:</u> <u>Sixth:</u> <u>Rev:</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1 |
| Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR * | 12,000 lb (5448 kg) 20,000 lb (9080 kg) 32,000 lb (14 528 kg) 42,000 lb (19 068 kg) |
| Wheelbase | 252 in (6400 mm) |
| Front Axle Capacity Track Width | I-Beam, wide track 12,000 lb (5448 kg) 82.89 in (2105 mm) |
| Rear Axle Drive Ratio Capacity Track Width | 4.63:1 20,000 lb (9080 kg) 72.1 in (1830 mm) |
| Brakes Front and Rear Service Parking | Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull lever controlled |
| Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan | 2 rows, 15 FPI, 1000 in ² (6452 cm ²) Cross-flow, rear mounted Cross-flow Remote mounted water-to-oil Belt driven electronically controlled viscous clutch |
| Electrical System Alternator Starting Battery | Leece-Neville 200 amp Delco 38MT 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free |
| Frame Max Resist. Bending Moment Max Frame Section | Raised Rail Frame Configuration 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 6.4 mm) |
| Fuel Tank | 150 gal (568 L), dual fuel fill |
| Steering System Rating Ratio Pump Wheel Cut ** | TRW THP 60, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 55° |
| Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam | Neway air suspension (front and rear) Tuned shocks, Sachs 1.50 in (38 mm) (front) |
| Tires | Goodyear G670 RV 275/780R 22.5, LRH |
| Wheels | 4 Aluminum 2 Steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center |
| Instrumentation | Gauges: Speedometer with Odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Transmission Temperature • Fuel Level • Air Pressure |