




XC- Series Motorhome Chassis

FEATURE

BENEFIT

- | | |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 50 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2005 MODEL YEAR

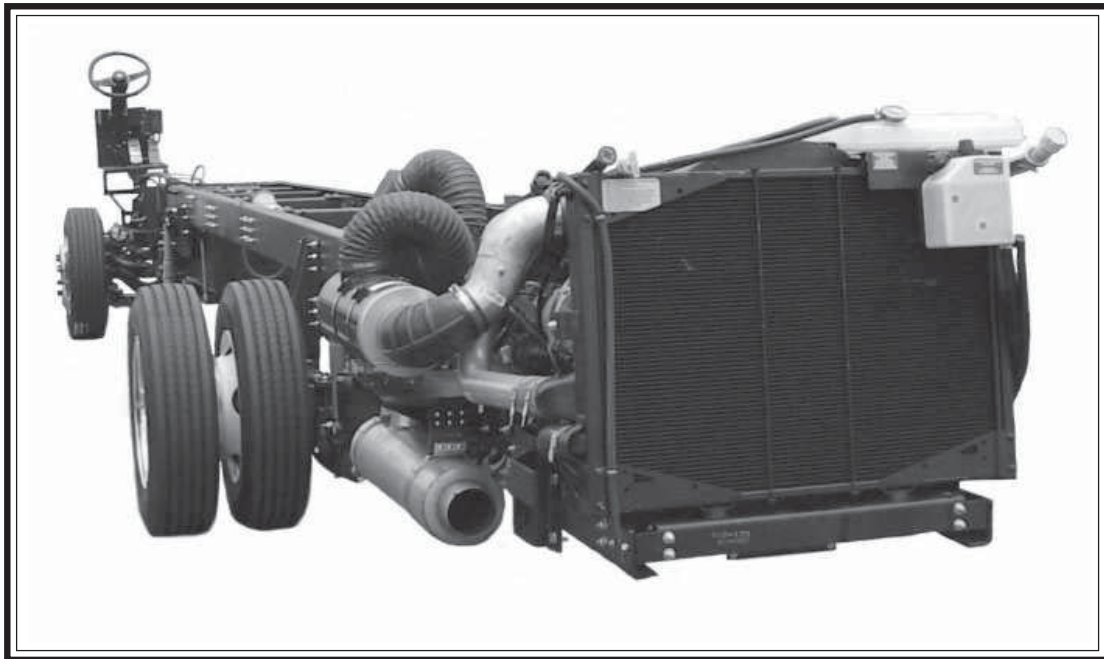

Sky Deck

by Airstream

Sky Deck by Airstream Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco -air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Exhaust brake
- R-134A air conditioning compressor
- Electronic cruise control with high idle
- VIP steering wheel 18in (457mm)
- Douglas tilt/telescoping steering column
- Suspended & adjustable pedals
- Push button shift control
- LCD Info center
- Neway air ride suspension/tuned Sachs shock absorbers
- Michelin XZA1 275/80R 22.5, LRH
- ACCU-SHIELD Polished aluminum wheels with trim kit
- Heater hose assembly to front of chassis
- Haldex PUrest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheelcut.

*** Some maintenance required.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/03/04, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XC-SERIES	
Engine Peak Hp Peak Torque	Caterpillar C7 turbocharged, aftercooled 7.2 L electronic diesel 330 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
Transmission Gear Ratios:	Allison 3000MH six-speed automatic with lock up <u>First:</u> <u>Second:</u> <u>Third:</u> <u>Fourth:</u> <u>Fifth:</u> <u>Sixth:</u> <u>Rev:</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	12,000 lb (5448 kg) 19,000 lb (8626 kg) 31,000 lb (14 074 kg) 41,000 lb (18 614 kg)
Wheelbase	252 in (6400 mm)
Front Axle Capacity Track Width	I-Beam, wide track 12,000 lb (5448 kg) 81.9 in (2080 mm)
Rear Axle Drive Ratio Capacity Track Width	4.78:1 19,000 lb (8626 kg) 72.1 in (1830 mm)
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull lever controlled
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1050 in ² (6775 cm ²) Cross-flow, rear mounted Cross-flow Remote mounted water-to-oil Belt driven
Electrical System Alternator Starting Battery	Leece-Neville 160 amp Denso 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free
Frame Max Resist. Bending Moment Max Frame Section	Raised Rail Frame Configuration 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 6.4 mm)
Fuel Tank	150 gal (341 L), dual fuel fill
Steering System Rating Ratio Pump Wheel Cut **	TRW TAS 65, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 50°
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension (front and rear) Tuned shocks, Sachs 1.50 in (38 mm) (front)
Tires	Michelin XZA1 275/80R 22.5, LRH
Wheels	4 Aluminum 2 Steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with Odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Transmission Temperature • Fuel Level • Air Pressure