




A Subsidiary of **FREIGHTLINER**  
LLC

## XC- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty .....	Best in The Industry
■ 9" 50,000 PSI Frame Rail .....	Solid Foundation
■ 50 Degree Wheel Cut .....	Excellent Maneuverability
■ Over 350 Dealers .....	Service Where You Need It

2002 MODEL YEAR

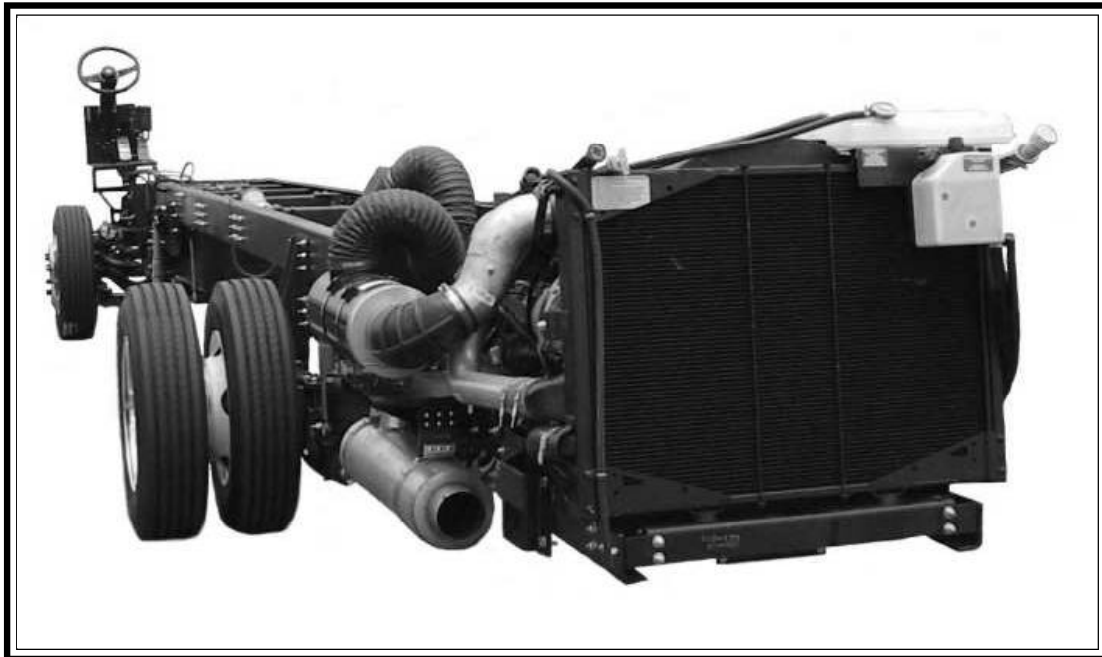

# See Ya!

by Alfa Leisure

## See Ya! by Alfa Leisure Custom Chassis Features

- 13.2 CFM air compressor
- 70 in (1778 mm) front overhang
- Farr Eco-air cleaner
- Air filter restriction indicator
- Neway air ride suspension with tuned Bilstein shock absorbers
- Douglas tilt/telescoping steering column
- Air suspension deflation system
- Fuel/water separator
- Michelin XZE 275/80R 22.5 LRG tires
- Heater hose assembly to front of chassis
- 1000 watt in-block engine heater
- Electronic cruise control with high idle
- Midland Pure Air Plus heated air dryer
- Push button shift control
- R-134A air conditioning compressor
- VIP leather wrapped smart wheel, 18 in (457 mm)
- Exhaust brake

\* Towing capacity limited by towing components and their attachment to the frame.

\*\* Tire size may affect wheel cut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/04/01, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-478-9805.



A Subsidiary of **FREIGHTLINER** LLC

## XC-SERIES

Engine	Caterpillar 3126E turbocharged, aftercooled, 7.2 L electronic diesel 330 Hp @ 2,200 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
Transmission	Allison 3000MH six-speed automatic with lock up
Gear Ratios:	<u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings	Front GAWR 12,000 lb (5448 kg) Rear GAWR 19,000 lb (8626 kg) GVWR 29,500 lb (13 393 kg) GCWR * 39,500 lb (17 933 kg)
Wheelbase	228 in (5790 mm)
Front Axle	Meritor FF-961 I-Beam, wide track
Capacity	12,000 lb (5448 kg)
Track Width	81.9 in (2080 mm)
Rear Axle	Meritor RS-19-145
Drive Ratio	4.63:1
Capacity	19,000 lb (8626 kg)
Track Width	72.1 in (1830 mm)
Brakes	Full air brakes with auto slack adjusters and ABS (drum-style S-cam)
Front Service	15 x 4 in
Rear Service	16.5 x 7 in
Parking (rear axle)	Spring applied air release Push-pull lever controlled
Cooling System	
Radiator Core	2 rows, 15 FPI, 1050 in <sup>2</sup> (6775 cm <sup>2</sup> ) area
Radiator Type	Cross-flow, rear mounted
Charge Air Cooler	Cross-flow
Transmission Oil Cooler	Remote mounted water-to-oil
Fan	Belt driven
Electrical System	
Alternator	Delco 130 amp
Starting	Delco 37MT, 12 volt
Battery	Two 760 CCA @ 0°F (-18°C); maintenance-free
Frame	Raised Frame Rail Construction
Max Resist. Bending Moment	291,000 lb•in (32 892 N•m)
Max Frame Section	9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)
Fuel Tank	100 gal (379 L), left fuel fill
Steering System	TRW TAS 65, integral hydraulic power gear
Rating	12,000 lb (5448 kg)
Ratio	20.4:1
Pump	Gear-driven
Wheel Cut**	50°
Suspension	Neway air suspension (front and rear)
Shock Absorber	Tuned shocks, Bilstein
Heavy-Duty Stabilizer Bar Diam	1.50 in (38 mm) (front)
Tires	Six Michelin XZE 275/80R 22.5 LRG
Wheels	22.5 x 7.5 in (522 x 191 mm) with 10 bolt lugs 11.25 in (285.25 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure