



A Subsidiary of **FREIGHTLINER**
LLC


XC- Series Motorhome Chassis

FEATURE

BENEFIT

- | | |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 50 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2002 MODEL YEAR

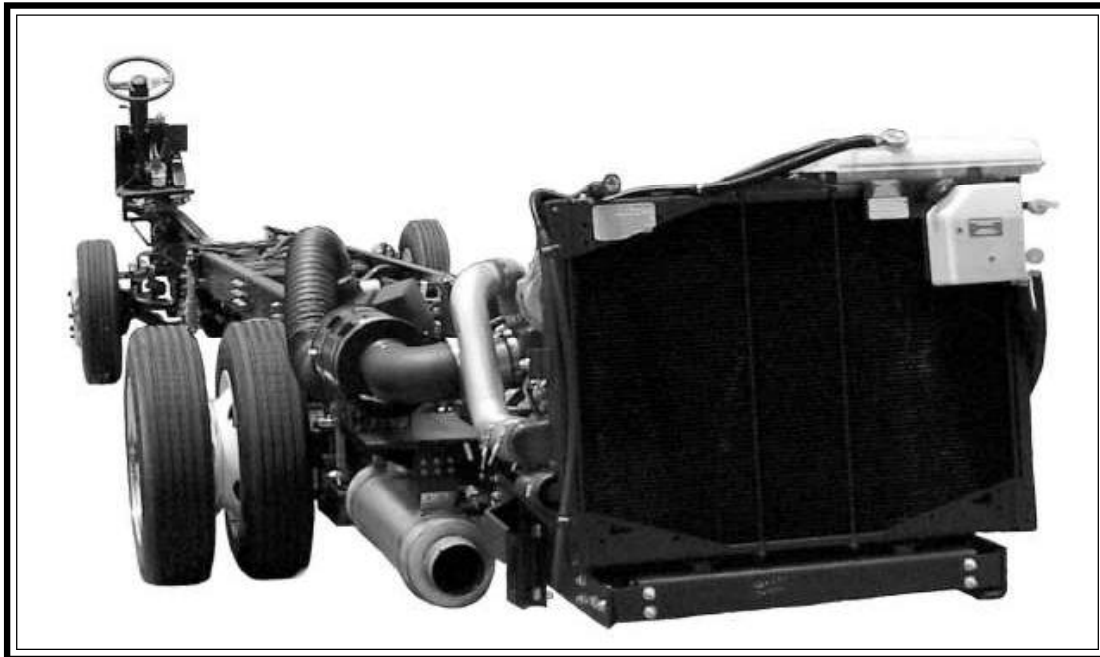

Cross Country Elite

by Coachmen Recreational Vehicle Co.

**Cross Country Elite
by Coachmen
Recreational Vehicle Co.
Custom Chassis
Features**

- 15.2 CFM air compressor
- 70 in (1778 mm) front overhang
- Farr Eco-air cleaner
- Air filter restriction indicator
- Neway air ride suspension/Bilstein tuned shock absorbers
- Douglas tilt/telescoping steering column
- Fuel/water separator
- Michelin XRV 235/80R22.5, LRG
- Heater hose assembly to front of chassis
- 750 watt in-block engine heater
- Electronic cruise control with high idle
- Midland Pure Air Plus heated air dryer
- R-134A air conditioning compressor with condensor
- VIP steering wheel, 18 in (457 mm)

* Towing capacity limited by towing components and their attachment to the frame.

**Tire size may affect wheel cut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/04/01, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-478-9805.



A Subsidiary of **FREIGHTLINER** LLC

XC-SERIES

Engine	Cummins ISB turbocharged, aftercooled, 5.9 L electronic diesel 300 Hp @ 2,600 rpm 660 lb•ft (895 N•m) @ 1,700 rpm
Transmission	Allison 3000 MH six-speed automatic with lock up Gear Ratios: <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings	Front GAWR 9,350 lb (4245 kg) Rear GAWR 17,500 lb (7945 kg) GVWR 26,850 lb (12 190 kg) GCWR * 36,850 lb (16 730 kg)
Wheelbase	208 in (5283mm)
Front Axle	Meritor FD-965 I-Beam, wide track Capacity 10,500 lb (4762 kg) Track Width 81.9 in (2080 mm)
Rear Axle	Meritor RS-17-145 Drive Ratio 4.63:1 Capacity 17,500 lb (7945 kg) Track Width 72.1 in (1830 mm)
Brakes	Full air brakes with auto slack adjusters and ABS Front and Rear Service 15 x 4 in (front) and 16..5 x 7 in (rear) drum-style S-cam Parking Spring-applied air release 16. 5 x 7 in drum-style (rear axle) Push-pull lever controlled
Cooling System	Radiator Core 2 rows, 15 FPI, 1050 in ² (6775 cm ²) Radiator Type Cross-flow, rear mounted Charge Air Cooler Cross-flow Transmission Oil Cooler Remote mounted water to oil Fan Belt driven
Electrical System	Alternator Leece-Neville, 160 amp Starting Delco 28MT, 12 volt Battery Two 760 CCA @ 0°F (-18°C); maintenance-free
Frame	Straight Frame Rail Construction Max Resist. Bending Moment 291,000 lb•in (32 892 N•m) Max Frame Section 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)
Fuel Tank	90 gal (341 L), dual fuel fill
Steering System	TRW TAS 65, integral hydraulic power gear Rating 12,000 lb (5448 kg) Ratio 20.4:1 Pump Gear-driven Wheel Cut** 50°
Suspension	Neway air suspension (front and rear) Shock Absorber Tuned shocks, Bilstein Heavy-Duty Stabilizer Bar Diam 1.50 in (38 mm) (front)
Tires	Six Michelin XRV 235/80R22.5, LRG
Wheels	Steel 22.5 x 7.5 in (522 x 191 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Coolant Level • Voltmeter • Fuel Level • Dual Air Pressure