




## XCS- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty .....	Best in The Industry
■ 50,000 PSI Frame Rail .....	Solid Foundation
■ 55 Degree Wheel Cut .....	Excellent Maneuverability
■ 400 Dealers .....	Service Where You Need It

2007 MODEL YEAR

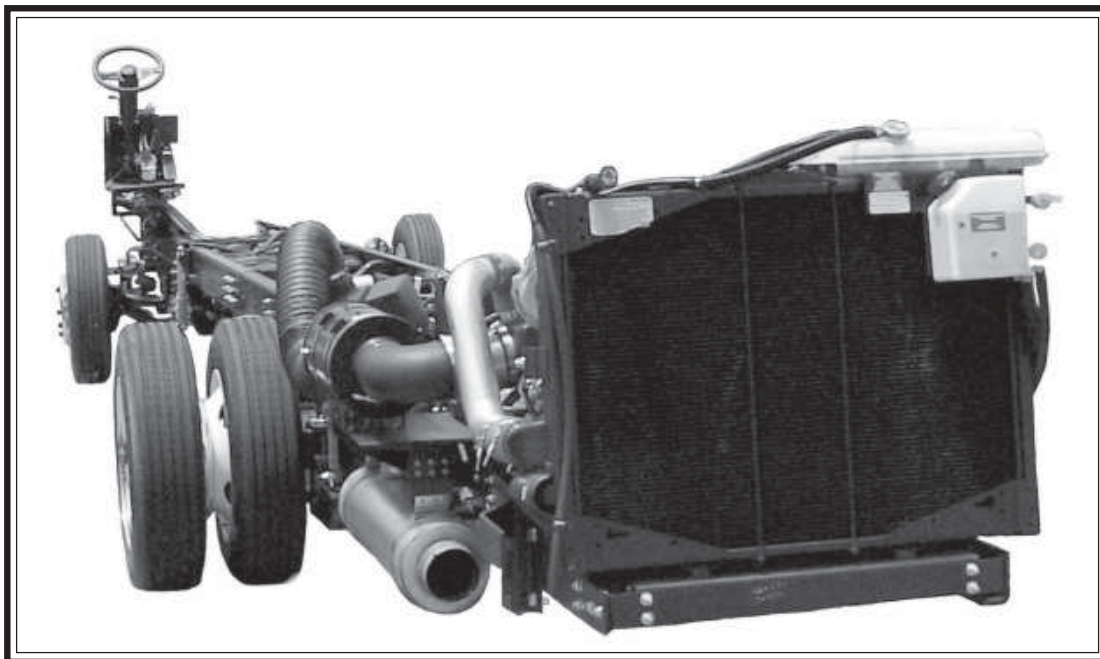

Bounder  
by Fleetwood

## Bounder by Fleetwood RV Custom Chassis Features

- 5 year, 100,000 mile coolant \*\*\*
- TranSynd Transmission Fluid
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Engine Braking: Exhaust brake
- R-134A air conditioning compressor with condensor
- Electronic cruise control with high idle
- VIP steering wheel, 18 in (457 mm)
- TRW infinitely adjustable tilt/telescoping steering column
- Push button shift control
- Driver message center with intergral LCD display
- Neway air ride suspension/Sachs tuned shock absorbers
- Goodyear G670 RV 275/70R 22.5 LRH tires
- Heater hose assembly to front of chassis
- Haldex PURest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector

\* Towing capacity limited by towing components and their attachment to the frame.

\*\* Tire size may affect wheel cut.

\*\*\* Some maintenance required

*For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 8/05/06, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.*



XCS-SERIES															
Engine Peak Hp Peak Torque	Caterpillar C7 turbocharged, aftercooled, 7.2 L electronic diesel 300 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm														
Transmission Gear Ratios:	Allison 3000 MH six-speed automatic with lock up  <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"><u>First</u></td> <td style="text-align: center;"><u>Second</u></td> <td style="text-align: center;"><u>Third</u></td> <td style="text-align: center;"><u>Fourth</u></td> <td style="text-align: center;"><u>Fifth</u></td> <td style="text-align: center;"><u>Sixth</u></td> <td style="text-align: center;"><u>Rev.</u></td> </tr> <tr> <td style="text-align: center;">3.49:1</td> <td style="text-align: center;">1.86:1</td> <td style="text-align: center;">1.41:1</td> <td style="text-align: center;">1.00:1</td> <td style="text-align: center;">.75:1</td> <td style="text-align: center;">.65:1</td> <td style="text-align: center;">5.03:1</td> </tr> </table>	<u>First</u>	<u>Second</u>	<u>Third</u>	<u>Fourth</u>	<u>Fifth</u>	<u>Sixth</u>	<u>Rev.</u>	3.49:1	1.86:1	1.41:1	1.00:1	.75:1	.65:1	5.03:1
<u>First</u>	<u>Second</u>	<u>Third</u>	<u>Fourth</u>	<u>Fifth</u>	<u>Sixth</u>	<u>Rev.</u>									
3.49:1	1.86:1	1.41:1	1.00:1	.75:1	.65:1	5.03:1									
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	12,000 lb (5448 kg) 19,000 lb (8626 kg) 31,000 lb (14 074 kg) 41,000 lb (18 614 kg)														
Wheelbase	208 in (5283mm)                      252 in (6426 mm)														
Front Axle Capacity Track Width	I-Beam, wide track 12,000 lb (5448 kg) 82.36 in (2092 mm)														
Rear Axle Drive Ratio Capacity Track Width	4.78:1 19,000 lb (8626 kg) 72.1 in (1830 mm)														
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring-applied air release 16.5 x 7 in drum-style (rear axle) Push-pull lever controlled														
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1000 in <sup>2</sup> (6452 cm <sup>2</sup> ) area Cross-flow, rear mounted Cross-flow Remote mounted water to oil Belt driven														
Electrical System Alternator Starting Battery	Leece-Neville 170 amp Delco 28MT, 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free														
Frame Max Resist. Bending Moment Max Frame Section	Straight Frame Rail <b>Optional lowered rear section</b> 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x 5/16 in														
Fuel Tank	90 gal (341 L), dual fuel fill														
Steering System Rating Ratio Pump Wheel Cut**	TRW THP 60, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 55°														
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension (front and rear) Tuned shocks, Sachs 1.50 in (38 mm) (front)														
Tires	Goodyear G670 RV 275/70R 22.5 LRH														
Wheels	Steel 22.5 x 8.25 in (572 x210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center														
Instrumentation	Gauges: Speedometer • Tachometer • Engine Oil Pressure • Water Temperature • Coolant Level • Voltmeter • Fuel Level • Dual Air Pressure														