




XC- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty	Best in The Industry
■ 9" 50,000 PSI Frame Rail	Solid Foundation
■ 55 Degree Wheel Cut	Excellent Maneuverability
■ Over 350 Dealers	Service Where You Need It

2006 MODEL YEAR

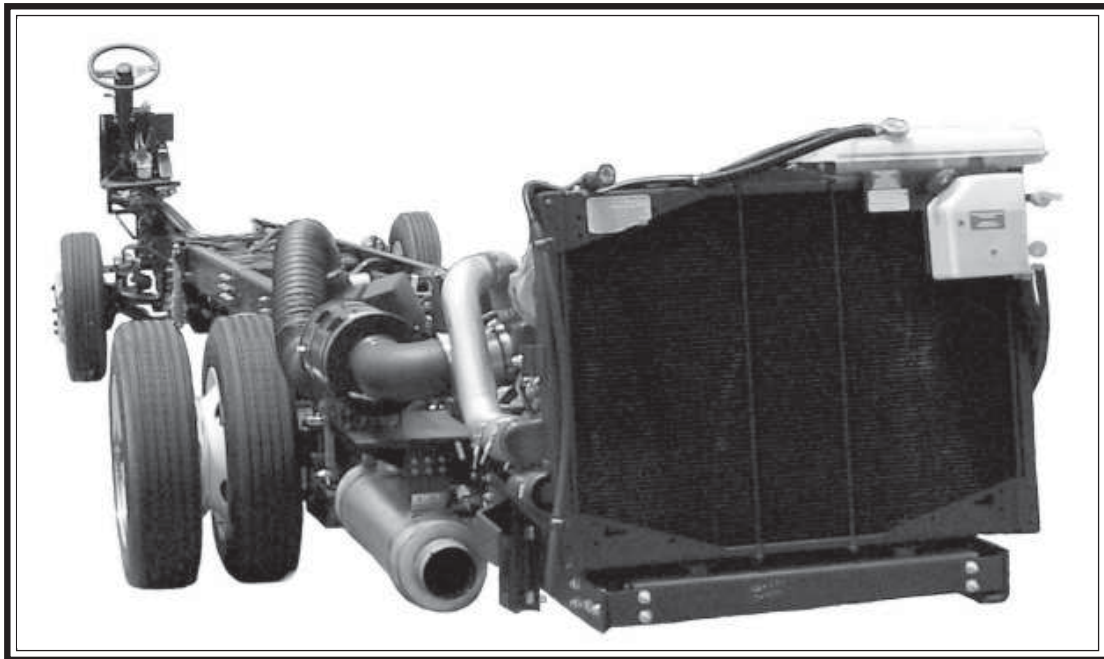

Providence

by Fleetwood

Providence by Fleetwood Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Engine Braking: Exhaust brake
- R-134A air conditioning compressor with condensor
- Electronic cruise control with high idle
- VIP steering wheel, 18 in (457 mm)
- Douglas tilt/telescoping steering column
- Push button shift control
- LCD Info center
- Neway air ride suspension/Sachs tuned shock absorbers
- Goodyear G670 RV 275/70R 22.5 LRH tires
- Polished aluminum wheels with trim kit
- Heater hose assembly to front of chassis
- Haldex PURest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheel cut.

*** Some maintenance required

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 9/03/05, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XC-SERIES

Engine	Caterpillar C7 turbocharged, aftercooled, 7.2 L electronic diesel Peak Hp 350 Hp @ 2,400 rpm Peak Torque 860 lb•ft (1166 N•m) @ 1,440 rpm
Transmission	Allison 3000 MH six-speed automatic with lock up Gear Ratios: <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings	Front GAWR 12,000 lb (5448 kg) Rear GAWR 19,000 lb (8626 kg) GVWR 31,000 lb (14 074 kg) GCWR * 41,000 lb (18 614 kg)
Wheelbase	252 in (6401 mm)
Front Axle	I-Beam, wide track Capacity 12,000 lb (5448 kg) Track Width 82.89 in (2105 mm)
Rear Axle	Drive Ratio 4.63:1 Capacity 19,000 lb (8626 kg) Track Width 72.1 in (1830 mm)
Brakes	Full air brakes with auto slack adjusters and ABS Front and Rear Service 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Parking Spring-applied air release 16.5 x 7 in drum-style (rear axle) Push-pull lever controlled
Cooling System	Radiator Core 2 rows, 15 FPI, 1000 in ² (6452 cm ²) area Radiator Type Cross-flow, rear mounted Charge Air Cooler Cross-flow Transmission Oil Cooler Remote mounted water to oil Fan Belt driven
Electrical System	Alternator Leece-Neville 160 amp Starting Denso 12 volt Battery Two 760 CCA @ 0°F (-18°C); maintenance-free
Frame	Straight Frame Rail Optional lowered rear section Max Resist. Bending Moment 291,000 lb•in (32 892 N•m) Max Frame Section 9.00 x 2.75 x 5/16 in
Fuel Tank	90 gal (341 L), dual fuel fill
Steering System	TRW THP 60, integral hydraulic power gear Rating 12,000 lb (5448 kg) Ratio 20.4:1 Pump Gear-driven Wheel Cut ** 55°
Suspension	Neway air suspension (front and rear) Shock Absorber Tuned shocks, Sachs Heavy-Duty Stabilizer Bar Diam 1.50 in (38 mm) (front)
Tires	Goodyear G670 RV 275/70R 22.5 LRH
Wheels	4 Aluminum 2 Steel 22.5 x 8.25 in (522 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure