




XC- Series Motorhome Chassis

FEATURE

BENEFIT

- | | |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 50 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2004 MODEL YEAR

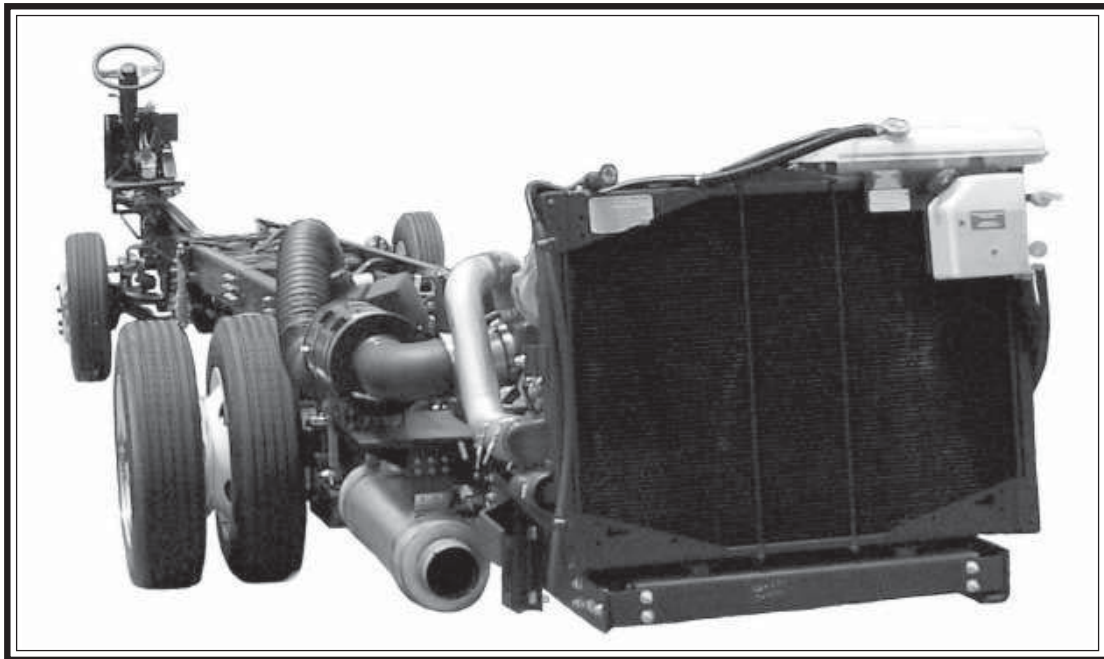

Bounder

by Fleetwood

Boulder by Fleetwood RV Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Exhaust brake
- R-134A air conditioning compressor with condensor
- Electronic cruise control with high idle
- VIP steering wheel, 18 in (457 mm)
- Douglas tilt/telescoping steering column
- Push button shift control
- Neway air ride suspension/Sachs tuned shock absorbers
- 255/80R22.5, LRG tires
- Polished aluminum wheels with trim kit (Optional)
- Heater hose assembly to front of chassis
- Haldex Pure Air Plus heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame.

** Tire size may affect wheel cut.

*** Some maintenance required

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/03/03, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XC-SERIES															
Engine Peak Hp Peak Torque	Cummins ISB turbocharged, aftercooled, 5.9 L electronic diesel 300 Hp @ 2,600 rpm 660 lb•ft (895 N•m) @ 1,700 rpm														
Transmission Gear Ratios:	Allison 3000 MH six-speed automatic with lock up <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"><u>First</u></td> <td style="text-align: center;"><u>Second</u></td> <td style="text-align: center;"><u>Third</u></td> <td style="text-align: center;"><u>Fourth</u></td> <td style="text-align: center;"><u>Fifth</u></td> <td style="text-align: center;"><u>Sixth</u></td> <td style="text-align: center;"><u>Rev.</u></td> </tr> <tr> <td style="text-align: center;">3.49:1</td> <td style="text-align: center;">1.86:1</td> <td style="text-align: center;">1.41:1</td> <td style="text-align: center;">1.00:1</td> <td style="text-align: center;">.75:1</td> <td style="text-align: center;">.65:1</td> <td style="text-align: center;">5.03:1</td> </tr> </table>	<u>First</u>	<u>Second</u>	<u>Third</u>	<u>Fourth</u>	<u>Fifth</u>	<u>Sixth</u>	<u>Rev.</u>	3.49:1	1.86:1	1.41:1	1.00:1	.75:1	.65:1	5.03:1
<u>First</u>	<u>Second</u>	<u>Third</u>	<u>Fourth</u>	<u>Fifth</u>	<u>Sixth</u>	<u>Rev.</u>									
3.49:1	1.86:1	1.41:1	1.00:1	.75:1	.65:1	5.03:1									
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	10,410 lb (4726 kg) 17,500 lb (7945 kg) 27,910 lb (12 671 kg) 37,910 lb (17 211 kg)														
Wheelbase	242 in (6147mm) 252 in (6426 mm)														
Front Axle Capacity Track Width	I-Beam, wide track 10,500 lb (4762 kg) 81.9 in (2080 mm)														
Rear Axle Drive Ratio Capacity Track Width	4.78:1 17,500 lb (7945 kg) 72.1 in (1830 mm)														
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring-applied air release 16.5 x 7 in drum-style (rear axle) Push-pull lever controlled														
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1050 in ² (6775 cm ²) Cross-flow, rear mounted Cross-flow Remote mounted water to oil Belt driven														
Electrical System Alternator Starting Battery	Delco 130 amp Delco 28MT, 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free														
Frame Max Resist. Bending Moment Max Frame Section	Straight Frame Rail Construction 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)														
Fuel Tank	90 gal (341 L), dual fuel fill														
Steering System Rating Ratio Pump Wheel Cut**	TRW TAS 65, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 50°														
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension (front and rear) Tuned shocks, Sachs 1.50 in (38 mm) (front)														
Tires	255/80R22.5, LRG														
Wheels	Steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center														
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Coolant Level • Voltmeter • Fuel Level • Dual Air Pressure														