




XCR- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty	Best in The Industry
■ 50,000 PSI Frame Rail	Solid Foundation
■ 55 Degree Wheel Cut	Excellent Maneuverability
■ 400 Dealers	Service Where You Need It

2007 MODEL YEAR

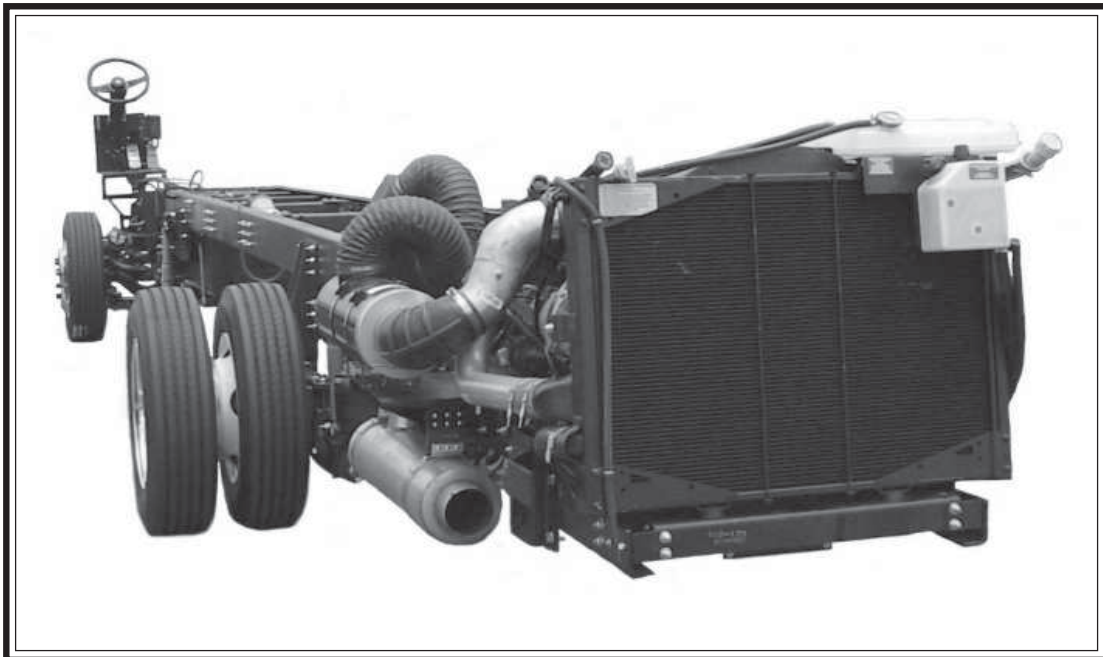

Berkshire
by Forest River

Berkshire by Forest River Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 15.2 CFM air compressor (ISB)
- 15.5 CFM air compressor (MBE)
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 750 watt in block heater (ISB)
- 1000 watt in block heater (MBE)
- Engine Braking :VGT (ISB) Compression Brake (MBE)
- R-134A air conditioning compressor with condensor
- Electronic cruise control with high idle
- VIP steering wheel, 18 in (457 mm)
- TRW infinitely adjustable tilt/telescoping steering column
- Push button shift control
- Driver message center with intergral LCD display
- 5" gauge package
- Neway air ride suspension/Sachs tuned shock absorbers
- XRV 255/80R 22.5 LRG
- Heater hose assembly to front of chassis
- Haldex PURest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector
- Polished aluminum wheels with trim kit (MBE only)

* Transmission limited GCWR. See operators manual for braking requirements on towed vehicle.

*** Some maintenance required

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 11/05/06, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XCR-SERIES	
Engine Peak Hp Peak Torque	Cummins ISB turbocharged, aftercooled 5.9 L electronic diesel 300 Hp @ 2,400 rpm 600 lb•ft (813 N•m) @ 1,440 rpm Mercedes-Benz MBE 926 turbocharged, aftercooled 7.2 L electronic diesel 330 Hp @ 2,200 rpm 1000 lb•ft (1356 N•m) @ 1,300 rpm
Transmission Gear Ratios: ISB Only	Allison 2500 MH five-speed automatic with lock up <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Rev.</u> 3.51:1 1.90:1 1.44:1 1.00:1 0.74:1 5.09:1
Transmission Gear Ratios: MBE Only	Allison 3000MH six-speed automatic with lock up <u>First:</u> <u>Second:</u> <u>Third:</u> <u>Fourth:</u> <u>Fifth:</u> <u>Sixth:</u> <u>Rev.:</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR * GCWR *	10,410 lb (4726 kg) 17,500 lb (7945 kg) 27,910 lb (12 671 kg) 33,000 lb (14 982 kg) 10,410 lb (4726 kg) 19,000 lb (8626 kg) 29,410 lb (13 352 kg) 39,410 lb (17 892 kg)
Wheelbase	228in (5792mm) 252in (6401mm)
Front Axle Capacity Track Width	I-Beam, wide track 10,500 lb (4767 kg) 82.24 in (2089 mm) I-Beam, wide track 10,500 lb (4767 kg) 82.24 in (2089 mm)
Rear Axle Drive Ratio Capacity Track Width	4.78:1 17,500 lb (7945 kg) 69.3 in (1760 mm) 4.63:1 19,000 lb (8626 kg) 69.3 in (1760 mm)
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull knob controlled
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1000 in ² Cross-flow, rear mounted Cross-flow Remote mtd water-to-oil Belt driven 2 rows, 15 FPI, 1000 in ² Cross-flow, rear mounted Cross-flow Remote mtd water-to-oil Belt driven /with clutch
Electrical System Alternator Starting Battery	Leece-Neville 170 amp 29MT, 12 volt Two 950 CCA @ 0°F (-18°C); maintenance-free
Frame Max Resist. Bending Moment Max Frame Section	Raised Frame Rail with lowered engine 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)
Fuel Tank	100 gal (378 L), dual fuel fill
Steering System Rating Ratio Pump Wheel Cut	TRW THP 60, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 55°
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension Tuned shocks, Sachs 1.50 in (38 mm) (front)
Tires	XRV 255/80R 22.5 LRG
Wheels	Steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Press