




XC- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty	Best in The Industry
■ 9" 50,000 PSI Frame Rail	Solid Foundation
■ 50 Degree Wheel Cut	Excellent Maneuverability
■ Over 350 Dealers	Service Where You Need It

2003 MODEL YEAR

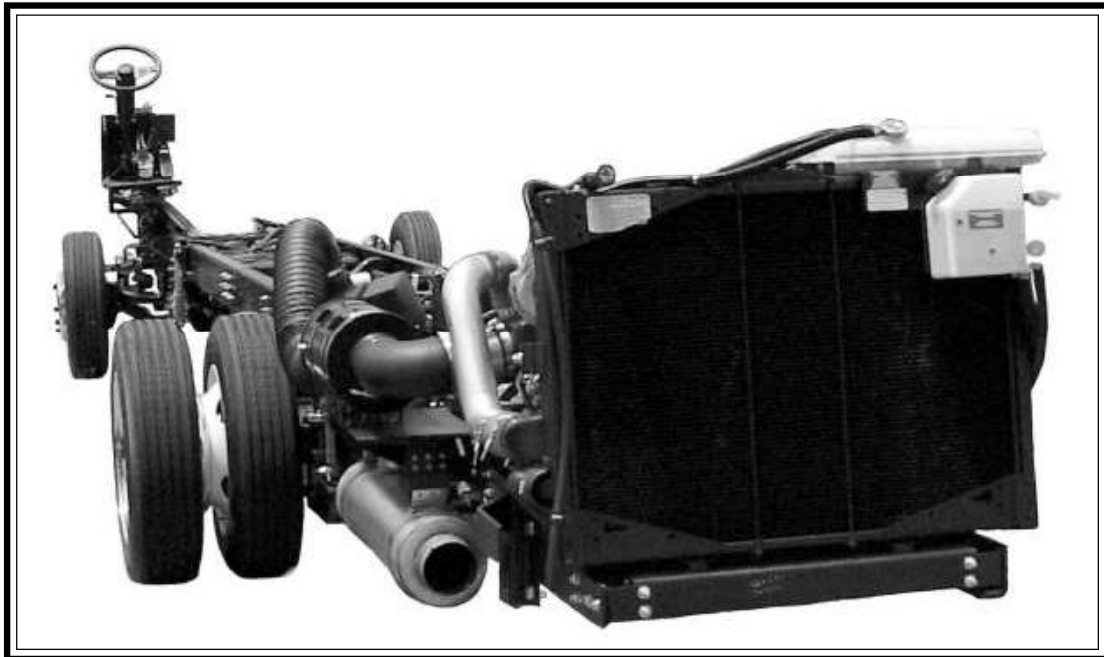

Reflection

by Forest River

Reflection by Forest River Custom Chassis Features

- 13,2 CFM air compressor
- 70 in (1778 mm) front overhang
- Farr Eco-air cleaner
- Air filter restriction indicator
- Neway air ride suspension/Sachs tuned shock absorbers
- Douglas tilt/telescoping steering column
- VIP leather wrapped smart wheel, 18 in (457 mm)
- Suspended and adjustable pedals
- Fuel/water separator
- Michelin tires
- Polished aluminum wheels
- Heater hose assembly to front of chassis
- 1000 watt block heater
- Exhaust brake
- Electronic cruise control with high idle
- Midland Pure Air Plus heated air dryer
- Dual Fuel Fill
- R-134A air conditioning compressor with condensor

* Towing capacity limited by towing components and their attachment to the frame.

** Tire size may affect wheel cut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 11/20/02, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



	XC-SERIES
Engine Peak Hp Peak Torque	Caterpillar 3126E turbocharged, aftercooled turb 7.2 L electronic diesel 330 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
Transmission Gear Ratios:	Allison 3000 MH six-speed automatic with lock up <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	12,000 lb (5448 kg) 19,000 lb (8626 kg) 31,000 lb (14 074 kg) 41,000 lb (18 614 kg)
Wheelbase	252 in (6400mm)
Front Axle Capacity Track Width	Meritor FF-961 12,000 lb (5448 kg) 81.9 in (2080 mm)
Rear Axle Drive Ratio Capacity Track Width	Meritor RS-19-145 4.63:1 19,000 lb (8626 kg) 72.1 in (1830 mm)
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16..5 x 7 in (rear) drum-style S-cam Spring-applied air release 16. 5 x 7 in drum-style (rear axle) Push-pull lever controlled
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1050 in ² (6775 cm ²) Cross-flow, rear mounted Cross-flow Remote mounted water to oil Belt driven
Electrical System Alternator Starting Battery	Leece-Neville 160 amp Denso 12 volt Two 950 CCA @ 0°F (-18°C); maintenance-free
Frame Max Resist. Bending Moment Max Frame Section	Raised Frame Rail 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)
Fuel Tank	100gal (379 L) dual fill
Steering System Rating Ratio Pump Wheel Cut**	TRW TAS 65, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 50°
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension (front and rear) Tuned shocks, Sachs 1.50 in (38 mm) (front)
Tires	XZE 275/80R22.5 LRG
Wheels	4 aluminum 2 steel 22.5x8.25 in (522x210mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Coolant Level • Voltmeter • Fuel Level • Dual Air Pressure