




XC- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty	Best in The Industry
■ 9" 50,000 PSI Frame Rail	Solid Foundation
■ 55 Degree Wheel Cut	Excellent Maneuverability
■ Over 350 Dealers	Service Where You Need It

2006 MODEL YEAR

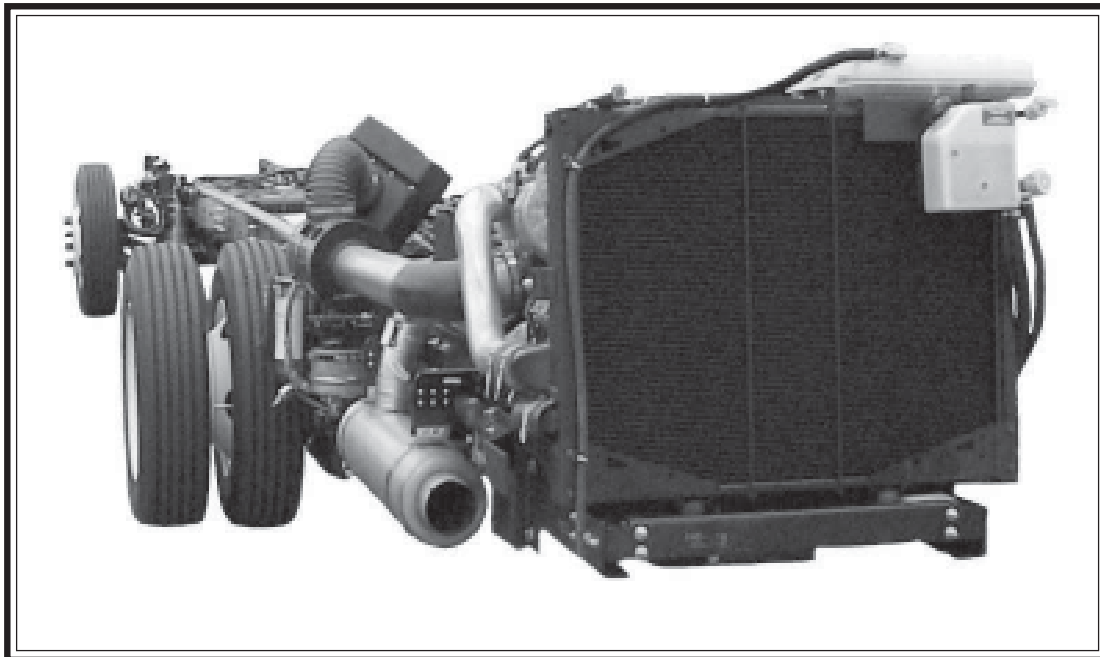

34', 36', 39' Meridian

by Itasca

34',36',39' Meridian by Itasca Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 1000 watt in-block heater
- Engine Braking: Exhaust brake
- Battery shut off switch
- R-134A air conditioning compressor
- Electronic cruise control with high idle
- VIP steering wheel, 18 in (457 mm)
- Douglas tilt/telescoping steering column
- Push Button shift control
- LCD Info center
- Neway air ride suspension Sachs tuned shock absorbers
- Michelin XRV 255/80R 22.5 LRG tires
- Polished aluminum wheels with trim kit
- Heater hose assembly to front of chassis
- Haldex PUrest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheel cut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/02/05, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



	XC-SERIES
Engine Peak Hp Peak Torque	Caterpillar C7 turbocharged, aftercooled 7.2 L electronic diesel 350 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
Transmission Gear Ratios:	Allison 3000MH six-speed automatic with lock up <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	10,410 lb (4726 kg) 17,500 lb (7945 kg) 27,910 lb (12 671 kg) 37,910 lb (17 211 kg)
Wheelbase	208in (5283mm) 228in (5791mm) 262 in (6655mm)
Front Axle Capacity Track Width	I-Beam, wide track 10,500 lb (4767 kg) 82.89 in (2105 mm)
Rear Axle Drive Ratio Capacity Track Width	4.78:1 17,500 lb (7945 kg) 72.4 in (1839 mm)
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull knob controlled
Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1000 in ² (6452 cm ²) area Cross-flow, rear mounted Cross-flow Remote mounted water-to-oil Belt driven
Electrical System Alternator Starting Battery	Leece-Neville 160 amp Delco 28MT, 12 volt Two 950 CCA @ 0°F (-18°C); maintenance-free
Frame Max Frame Section	Straight Frame Rail Construction 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)
Fuel Tank	90 gal (341 L), left side fuel fill
Steering System Rating Ratio Pump Wheel Cut **	TRW THP 60, integral hydraulic power gear 12,000 lb (4082 kg) 20.4:1 Gear-driven 55°
Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension Sachs tuned shocks 1.50 in (38 mm) (front)
Tires	Michelin XRV 255/80R 22.5 LRG
Wheels	4 aluminum 2 steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure