




XCR- Series Motorhome Chassis

<u>FEATURE</u>	<u>BENEFIT</u>
■ 3 Year, 50,000 Mile Warranty	Best in The Industry
■ 50,000 PSI Frame Rail	Solid Foundation
■ 55 Degree Wheel Cut	Excellent Maneuverability
■ 400 Dealers	Service Where You Need It

2007 MODEL YEAR

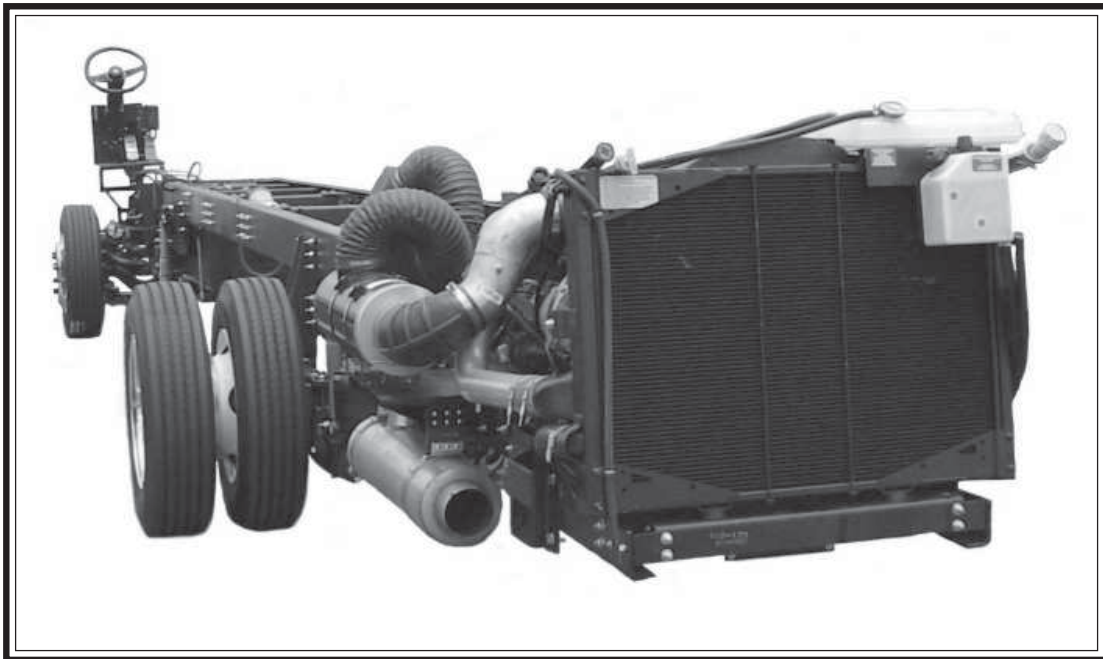

TROPI-CAL LX

by National RV

TROPICAL LX by National RV Custom Chassis Features

- 5 year, 100,000 mile coolant ***
- TranSynd Transmission Fluid
- 13.2 CFM air compressor
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 1000 watt in-block engine heater
- Engine braking: Exhaust brake
- R-134A air conditioning system
- Electronic cruise control with high idle
- VIP 18" steering wheel
- TRW infinitely adjustable tilt/telescoping steering column
- Push button shift control
- Driver message center with intergral LCD display
- Neway air ride suspension/tuned Sachs shock absorbers
- Goodyear G670 RV 275/70R 22.5, LRG
- Heater hose assembly to front of chassis
- Haldex PUrest heated air dryer
- Automatic, heated moisture ejector
- Air suspension deflation system
- Day Time running lights
- Tow power connector
- Polished aluminum wheels with trim kit (Optional)

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheel cut

*** Some maintenance required

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 8/05/06, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XCR-SERIES

Engine	Caterpillar C7 turbocharged, aftercooled 7.2 L electronic diesel 300 Hp @ 2,400 rpm 350 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm	
Transmission	Allison 3000 MH six-speed automatic with lock up Gear Ratios: First: Second: Third: Fourth: Fifth: Sixth: Reverse: 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1	
Vehicle Weight Ratings	Front GAWR Rear GAWR GVWR GCWR *	10,500 lb (4767 kg) 17,500 lb (7945 kg) 28,000 lb (12 710 kg) 38,000 lb (17 252 kg)
Wheelbase	208in (5283mm) 228in (5791mm) 252 in (6401mm)	
Front Axle	I-Beam, wide track Capacity Track Width	
Rear Axle	Drive Ratio Capacity Track Width	4.78:1 17,500 lb (7945 kg) 72.1 in (1830 mm)
Brakes	Full air brakes with auto slack adjusters and ABS Front and Rear Service Parking	
Cooling System	Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	
Electrical System	Alternator Starting Battery	
Frame	Max Resist. Bending Moment Max Frame Section	
Fuel Tank	100 gal (379 L), right fuel fill	
Steering System	Rating Ratio Pump Wheel Cut**	
Suspension	Shock Absorber Heavy-Duty Stabilizer Bar Diam	
Tires	Goodyear G670 RV 275/70R 22.5, LRG	
Wheels	Steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center	
Instrumentation	Gauges: Speedometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure	