




XC- Series Motorhome Chassis

FEATURE

BENEFIT

- | | |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 50 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2004 MODEL YEAR

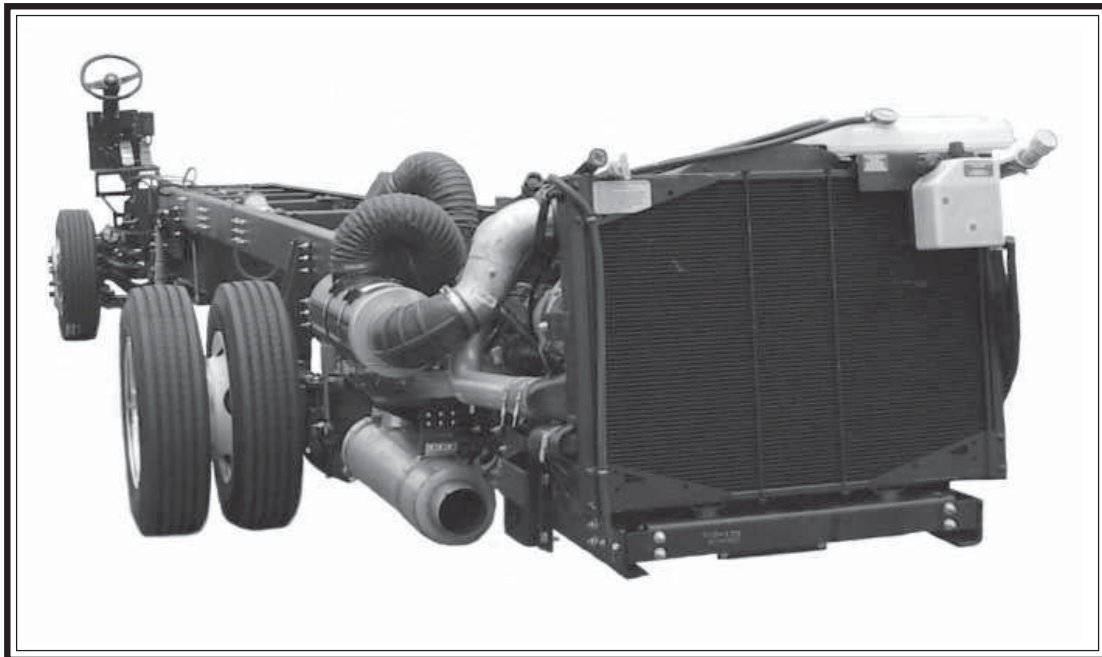

Kountry Star

by Newmar

Kountry Star by Newmar Custom Chassis Features

- 5 Year, 100,000 mile coolant ***
- 15.2 CFM air compressor (ISB)
13.2 CFM (C7)
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 750 watt in-block engine heater (ISB)
1000 watt (C7)
- Exhaust brake
- R-134A air conditioning compressor
- Electronic cruise control with high
idle
- VIP steering wheel 18 in (457mm)
- Douglas tilt/telescoping steering
column
- Neway air ride suspension/ Sachs
tuned shock absorbers
- Heater hose assembly to front of
chassis
- Haldex Purest Air Plus heated air
dryer
- Automatic, heated moisture ejectors
- Michelin XZA1 275/70R 22.5 LRH
- Raised frame rail
- Tow power connector

* Towing capacity limited by towing components and their attachment to the frame. See operators manual for braking requirements on towed vehicles

** Tire size may affect wheel cut.

*** Some maintenance required

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/03/03, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.



XC-SERIES

Engine Peak Hp Peak Torque	Cummins ISB turbocharged, aftercooled 5.9 L electronic diesel 300 Hp @ 2,500 rpm 660 lb•ft (895 N•m) @ 1,600 rpm	Caterpillar C7 turbocharged, aftercooled 7.2 L electronic diesel 330 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
	Transmission Gear Ratios: <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1	
Vehicle Weight Ratings Front GAWR Rear GAWR GVWR GCWR *	10,500 lb (4726 kg) 17,500 lb (7945 kg) 28,000 lb (12 712 kg) 38,000 lb (17 252 kg)	12,000 lb (5448 kg) 17,500 lb (7945 kg) 29,500 lb (13 393 kg) 39,500 lb (17 933 kg)
	Wheelbase 190 in(4826mm) 228 in(5791mm) 242 in(6147mm)	
Front Axle Capacity Track Width	I-Beam, wide track 10,500 lb (4762 kg) 81.9 in (1948 mm)	I-Beam, wide track 12,000 lb (5448 kg) 81.9 in (1948 mm)
	Rear Axle Drive Ratio Capacity Track Width 4.78:1 17,500 lb (7945 kg) 69.3 in (1760 mm)	
Brakes Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull knob controlled	
	Cooling System Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan 2 rows, 15 FPI, 1050 in ² (6775 cm ²) area Cross-flow, rear mounted Cross-flow Remote mounted water-to-oil Belt driven	
Electrical System Alternator Starting Battery	Delco 130 amp Delco 28MT, 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free	
	Frame Max Resist. Bending Moment Max Frame Section Raised Frame Rail Construction 291,000 lb•in (32 892 N•m) 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)	
Fuel Tank	100 gal (379 L), Dual fuel fill	
Steering System Rating Ratio Pump Wheel Cut **	TRW TAS 65, integral hydraulic power gear 12,000 lb (5448 kg) 20.4:1 Gear-driven 50°	
	Suspension Shock Absorber Heavy-Duty Stabilizer Bar Diam Neway air suspension (front and rear) Tuned Sachs schocks 1.50 in (38 mm) (front)	
Tires	Michelin radial XZA1 275/70R 22.5 LRH	
Wheels	Heavy duty steel 22.5 x 8.25 in (572 x 210 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center	
Instrumentation	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure	