




## **XC- Series Motorhome Chassis**

### **FEATURE**

### **BENEFIT**

- |                                      |                           |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty ..... | Best in The Industry      |
| ■ 9" 50,000 PSI Frame Rail .....     | Solid Foundation          |
| ■ 50 Degree Wheel Cut .....          | Excellent Maneuverability |
| ■ Over 350 Dealers .....             | Service Where You Need It |

2004 MODEL YEAR

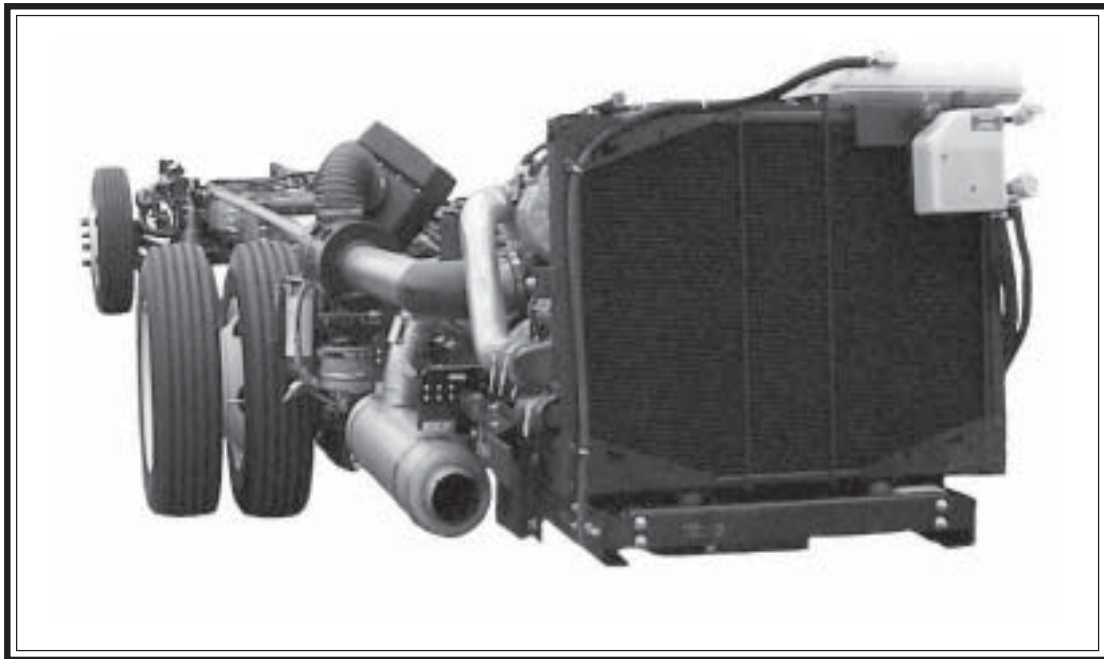

**3000 MH**

**32', 34', 36', 39' Journey**

by Winnebago Industries

## 32', 34', 36', 39' Journey by Winnebago Industries Custom Chassis Features

- 5 year, 100,000 mile coolant \*\*\*
- 15.2 CFM air compressor (ISB)  
13.2 CFM (C7)
- Fuel/water separator
- Farr Eco-air cleaner
- Air filter restriction indicator
- 750 watt in block heater (ISB)  
1,000 watt (3126E)
- Exhaust brake
- R-134A air conditioning compressor
- Electronic cruise control with high  
idle
- VIP steering wheel, 18 in (457 mm)
- Douglas tilt/telescoping steering  
column
- Push Button shift control
- Neway air ride suspension Sachs tuned  
shock absorbers
- Michelin XRV tires
- Heater hose assembly to front of  
chassis
- Automatic air suspension deflation  
system
- Haldex Pure Air Plus heated air dryer
- Automatic, heated moisture ejector
- Tow power connector

\* Towing capacity limited by towing components and their attachment to the frame. Refer to operators manual for braking requirements on towed vehicles

\*\* Tire size may affect wheel cut.

\*\*\* Some maintenance required

*For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/3/02, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-585-8831.*



	OPTIONAL 32'	OPTIONAL 34' & 36' STANDARD 39'
<b>Engine</b>  Peak Hp Peak Torque	Cummins ISB turbocharged, aftercooled 5.9 L electronic diesel 300 Hp @ 2,500 rpm 660 lb•ft (895 N•m) @ 1,600 rpm	Caterpillar C7 turbocharged, aftercooled 7.2 L electronic diesel 330 Hp @ 2,400 rpm 860 lb•ft (1166 N•m) @ 1,440 rpm
<b>Transmission</b>  Gear Ratios:	Allison 3000MH six-speed automatic with lock up  <u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1	
<b>Vehicle Weight Ratings</b> Front GAWR Rear GAWR GVWR GCWR *	10,410 lb (4726 kg) 17,500 lb (7945 kg) 27,910 lb (12 671 kg) 37,910 lb (17 211 kg)	
<b>Wheelbase</b>	190 in (4826mm)	208 in (5283mm) 228 in (5791mm) 262in (6655mm)
<b>Front Axle</b> Capacity Track Width	I-Beam, wide track 10,500 lb (4767 kg) 81.9 in (1948 mm)	
<b>Rear Axle</b> Drive Ratio Capacity Track Width	4.78:1 17,500 lb (7945 kg) 72.4 in (1839 mm)	
<b>Brakes</b> Front and Rear Service Parking	Full air brakes with auto slack adjusters and ABS 15 x 4 in (front) and 16.5 x 7 in (rear) drum-style S-cam Spring applied air release 16.5 x 7 in drum-style (rear axle) Push-pull knob controlled	
<b>Cooling System</b> Radiator Core Radiator Type Charge Air Cooler Transmission Oil Cooler Fan	2 rows, 15 FPI, 1050 in <sup>2</sup> (6775 cm <sup>2</sup> ) area Cross-flow, rear mounted Cross-flow Remote mounted water-to-oil Belt driven	
<b>Electrical System</b> Alternator Starting Battery	Delco 130 amp Delco 28MT, 12 volt Two 760 CCA @ 0°F (-18°C); maintenance-free	Leece-Neville 160 amp
<b>Frame</b> Max Frame Section	Straight Frame Rail Construction 9.00 x 2.75 x .25 in (229 x 70 x 4.8 mm)	
<b>Fuel Tank</b>	90 gal (341 L), left side fuel fill	
<b>Steering System</b> Rating Ratio Pump Wheel Cut **	TRW TAS 65, integral hydraulic power gear 12,000 lb (4082 kg) 20.4:1 Gear-driven 50°	
<b>Suspension</b> Shock Absorber Heavy-Duty Stabilizer Bar Diam	Neway air suspension Sachs tuned shocks 1.50 in (38 mm) (front)	
<b>Tires</b>	XRV 255/80R 22.5 LRG	
<b>Wheels</b>	4 Aluminum, 2 steel 22.5 x 7.50 in (572 x 191 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center	
<b>Instrumentation</b>	Gauges: Speedometer with odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure	